

RF Components


CF Series, CF6119101

Dielectric Filters


SMD

FEATURES


- Compact and high performance 3-pole filter.
- High reliability (Ceramic block filter).
- SMD type.



SHAPES AND DIMENSIONS

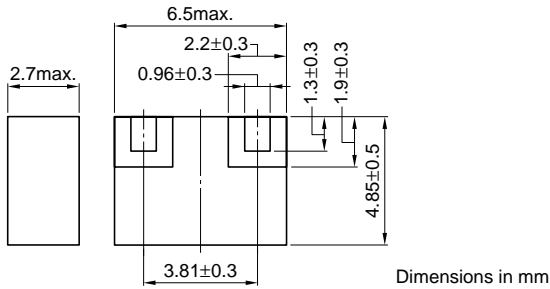


RECOMMENDED PC BOARD AND RESIST PATTERNS

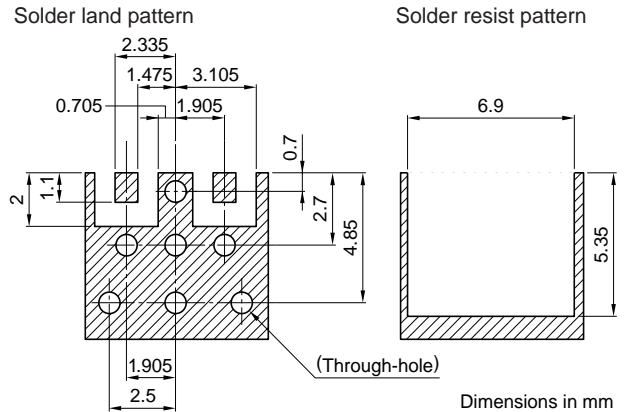

ELECTRICAL CHARACTERISTICS

Part No.	CF6119101
Center frequency	1532.5MHz
Band width	75MHz
Insertion loss	1.8dB max.
Return loss	14dB min.
Attenuation [1370MHz]	21.5dB min.
[1695MHz]	21.5dB min.

TYPICAL ELECTRICAL CHARACTERISTICS FREQUENCY CHARACTERISTICS

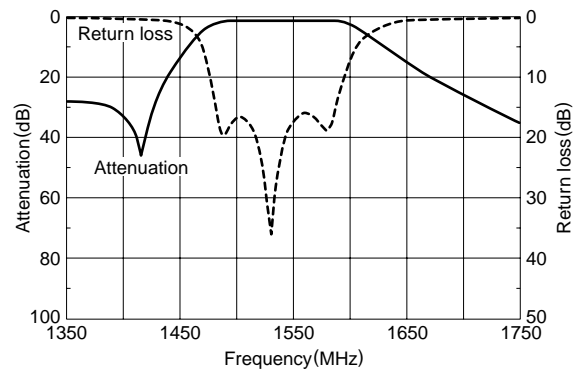

PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	1800 pieces/reel

